



Market-leading, industrial & commercial, non-corrosive style linear light fittings - Developed for advanced inspection pits, underpasses, spray booths and custodial applications.

10W-44W series power range - 1ft-5ft  
- IK10 impact & IP65 ingress resistance  
- >130lm/W family efficacy - Integrated, standalone, & wireless network, intelligent control available

CE, RoHS,  
international product marks



## *Vanguard Series Custodial Light*

CDN:SPEC239REV0

# Technical Specifications Summary



VAN-##A1



VAN-##D2

## Performance Summary:

Code (Series-Wattage/Size)	VAN-##A1	VAN-##B1	VAN-##B2	VAN-##C1	VAN-##C2	VAN-##D1	VAN-##D2
Enclosure	Corner	Corner	Rectangular	Corner	Rectangular	Corner	Rectangular
Nominal Power Options	10W, 13W, 16W, 18W	15W, 18W, 22W, 25W		21W, 25W, 30W, 36W		25W, 31W, 37W, 44W	
Luminaire Efficacy @ CRI>80, 5000K CCT	130lm/W						
Lumen Output @ CRI>80, 5000K CCT	1,300 to 2,340lm	1,950 to 3,250lm		2,730 to 4,680lm		3,250 to 5,720lm	
Lumen Maintenance (TM21 Calculated)	L80B10 ≥100,000 hours						
Certification	CE, RoHS						
Product Warranty	5 Years						

## Light Source and Photometric Parameters:

Chip Brand, Model, & Size	Jufei 2835
Light Emission	Direct
CCT	5000K, (3000K, 4000K, 6500K optional)
CRI	≥80Ra
SDCM	<3
Diffusers	Frosted
Symmetric Light Distribution	105°

## Electrical Parameters:

Driver Brand	Boke
Input Voltage	220-240VAC
Input Frequency	50-60Hz
Qty of Drivers per Light	1
Power Factor	>0.9
THD	<20% (220-240VAC)
Insulation Class	Class I

## Environmental Parameters<sup>1</sup>:

IP Rating	IP65
IK Rating	IK10
Ambient Usage Tolerance	-20°C to 40°C

## Physical/Mechanical Parameters:

Product Dimensions: LxWxH (mm)	328 x 120 x 120	628 x 120 x 120	628 x 160 x 78	1195 x 120 x 120	1195 x 160 x 78	1439 x 120 x 120	1439 x 160 x 78
Electrical Connection	Terminal Block						
Fixture Weight <sup>2</sup>	2.04kg	3.25kg	3.93kg	6.56kg	7.25kg	7.75kg	8.10kg
Fixture Primary Material(s)	Steel						
Lens(es) Materials	UV Stabilised Polycarbonate						

# Technical Specifications Summary

Code (Series-Wattage/Size)	VAN-##A1	VAN-##B1	VAN-##B2	VAN-##C1	VAN-##C2	VAN-##D1	VAN-##D2
<b>Dimming/Controls Parameters:</b>							
<b>Dimming Options</b>	1-10V, DALI						
<b>Compatible intelligent lighting systems</b>	Wireless Controls and Monitoring						
<b>Options/Accessories:</b>							
<b>Mounting Styles</b>	Surface Mounting						
<b>Available Product Colours</b>	White, Black						


<sup>1</sup> Details are for D1 non-dimming driver. Refer to alternative driver data sheets for their details

<sup>2</sup> Excludes bracketry. Refer to the Packaging Weights & Dimensions data sheet for bracketry and accessory weights

Please note - images shown are intended to be illustrative only. For exact data, please refer to specific product photometry, available for download from our website.

# Indicative Product Photometry

## 105° Optic

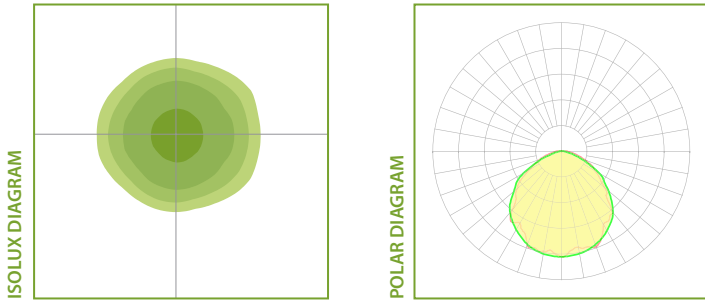

## Diffusers

This series is available with the following diffusers. Each diffuser will have a varying effect on photometric distribution and intensity. Please refer to downloadable photometrics for exact data.



Frosted Diffuser

Colourations on isolux diagrams are qualitative, i.e. the same colour on any two isolux diagrams will not necessarily have the same lux value.

All stated values should be considered indicative only. Technical data is provided from sample luminaires and construction components as assessed by OEM(s) under industry-standard, laboratory conditions. In practice, stated values can vary. Kellwood Lighting operates a policy of continual product improvement. Our luminaires' capabilities are regularly enhanced to outperform in-class market alternatives. Please contact our technical team directly for clarifications prior to purchase. All images depicted should be considered indicative only. Stated product warranty periods do not include associated labour costs. Stated product warranty periods are for UK projects only. For international projects, please contact our offices directly. Optional upgrades can often affect or supersede unit technical parameters, capabilities, and warranties. It is the responsibility of the purchasing authority to ensure selected hardware is suitable for application. For further documentation, including Returns Policy and Conditions of Unit Failure, please contact our offices. Hazardous area documentation (eg. ATEX) are issued to OEM codes. Please do not look directly at LED lighting products during operation.

This datasheet & corresponding certification should be reviewed by a competent person to ensure project suitability.

©2025 Kellwood Lighting Ltd. All rights reserved.



## Product Ordering Codes

## Corner Enclosure



PRODUCT	POWER & SIZE	TYPE	CRI & CCT	OPTIC	DRIVER	MOUNTING	COLOUR		
<b>VAN</b>	<b>##A</b> 10W, 13W, 16W & 18W AVAILABLE 328mm	<b>1</b> CORNER ENCLOSURE	<b>830</b> CRI >80, 3000K	<b>FR</b> FROSTED DIFFUSER	<b>D1</b> NON-DIM	<b>SM</b> SURFACE MOUNT	<b>WH</b> WHITE		
	<b>##B</b> 15W, 18W, 22W & 25W AVAILABLE 628mm						<b>840</b> CRI >80, 4000K	<b>D3</b> DALI	<b>BL</b> BLACK
	<b>##C</b> 21W, 25W, 30W, 36W AVAILABLE 1195mm						<b>850</b> CRI >80, 5000K		
	<b>##D</b> 25W, 31W, 37W, 44W AVAILABLE 1439mm						<b>865</b> CRI >80, 6500K		

Product Ordering Code Examples:

VAN-22B1-830-FR-D1-BL

VAN-36D1-850-FR-D3-WH

## Rectangular Enclosure



PRODUCT	POWER & SIZE	TYPE	CRI & CCT	OPTIC	DRIVER	MOUNTING	COLOUR		
<b>VAN</b>	<b>##B</b> 15W, 18W, 22W & 25W AVAILABLE 628mm	<b>2</b> RECTANGULAR ENCLOSURE	<b>830</b> CRI >80, 3000K	<b>FR</b> FROSTED DIFFUSER	<b>D1</b> NON-DIM	<b>SM</b> SURFACE MOUNT	<b>WH</b> WHITE		
	<b>##C</b> 21W, 25W, 30W, 36W AVAILABLE 1195mm						<b>840</b> CRI >80, 4000K	<b>D3</b> DALI	<b>BL</b> BLACK
	<b>##D</b> 25W, 31W, 37W, 44W AVAILABLE 1439mm						<b>850</b> CRI >80, 5000K		
							<b>865</b> CRI >80, 6500K		

Product Ordering Code Examples:

VAN-25B2-830-FR-D1-BL

VAN-44D2-850-FR-D3-WH

**GENERAL NOTES:**

1. IF MORE THAN ONE MODIFICATION IS REQUIRED, SEPARATE EACH MODIFICATION WITH A HYPHEN AT THE END OF THE PRODUCT CODE
2. PLEASE ENSURE SELECTION OF COMPATIBLE DRIVER FOR OCCUPANCY SENSORS WITH DIMMING FUNCTIONALITY
3. PLEASE NOTE THAT MODIFICATIONS WHICH AFFECT LIGHT OUTPUT HAVE SEPARATE PHOTOMETRIC FILES IDENTIFIED WITH "...+(MODIFICATION)\*"
4. ALTERNATIVE DRIVERS MAY BE AVAILABLE - PLEASE CONTACT OUR OFFICE FOR FURTHER DETAILS
5. IF PRODUCT IS CUSTOMISED, CODES WILL BE ALTERED AS NECESSARY

