


Technical Specifications Summary

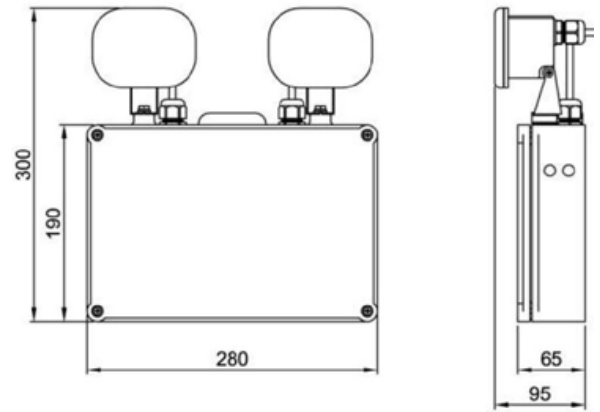

The Elliott series offers a simple emergency frog eye solution for a variety of emergency lighting applications. The only connection required is a permanent Live, Neutral and Earth. Suitable for a variety of industrial environments; the luminaire includes a factory fitted waterproof gasket giving the product a high IP65 ingress protection rating.

The Elliott series is a cost effective way of providing emergency lighting for a lower budget project. Higher output and DALI self-test versions are available with the 6W unit.

- 6W
- Wall Mount
- Directional LED Heads
- Deep Discharge Protection
- NiCd Batteries
- Non-Maintained Operation
- DALI Self-Test
- Simple Installation
- Cost-Effective Solution

CODE	DESCRIPTION
ELI-6-NM-T1	6W NON-MAINTAINED
ELI-6-NM-T3	6W NON-MAINTAINED, DALI, SELF-TEST

Technical Details

	ELI-6-NM-T1	ELI-6-NM-T3
Mains Supply	220-240 Volts 50/60Hz	
Power Rating	25mA $\lambda = 0.85$	26mA $\lambda = 0.88$
Duration	3 Hours	
Dimensions	280mm x 300mm x 95mm	
Battery Size & Type	7.2V 4.5Ah NiCd	
Weight	2kg	2.05kg
Ambient Temperature (T_a)	0 to 35°C	
Ingress Protection Rating	IP65	
Light Output	6 Watts	
Class	Class I	